

Product	DASH2PRO Yamaha R1/R6 R1 2002-3, R6 2002-4
Title	Customer installation instructions
Author	K. Ironmonger
Assembly Time	2 hours (Guide time only)
Last Revised	21/08/13




Removing bike parts

- **Front wind shield**



- **Remove the original dashboard**

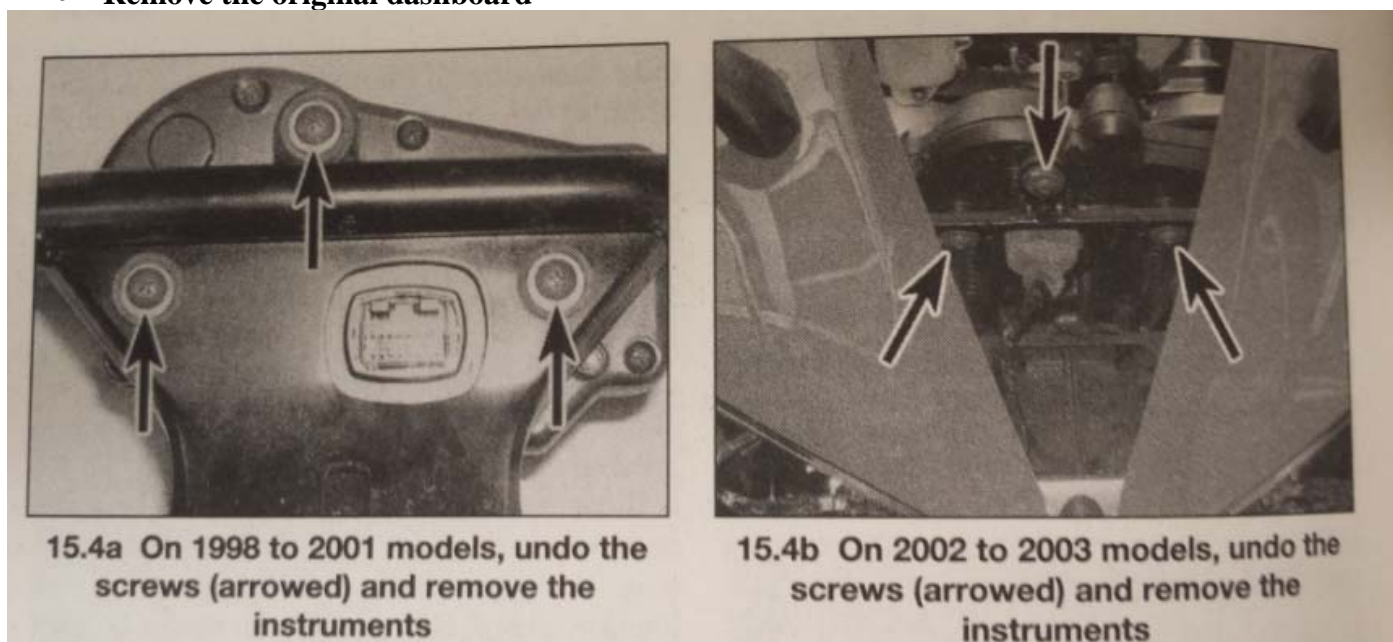


- **Disconnect the loom**



- **Remove fuel tank bolt and bracket**



- **Remove side panels**

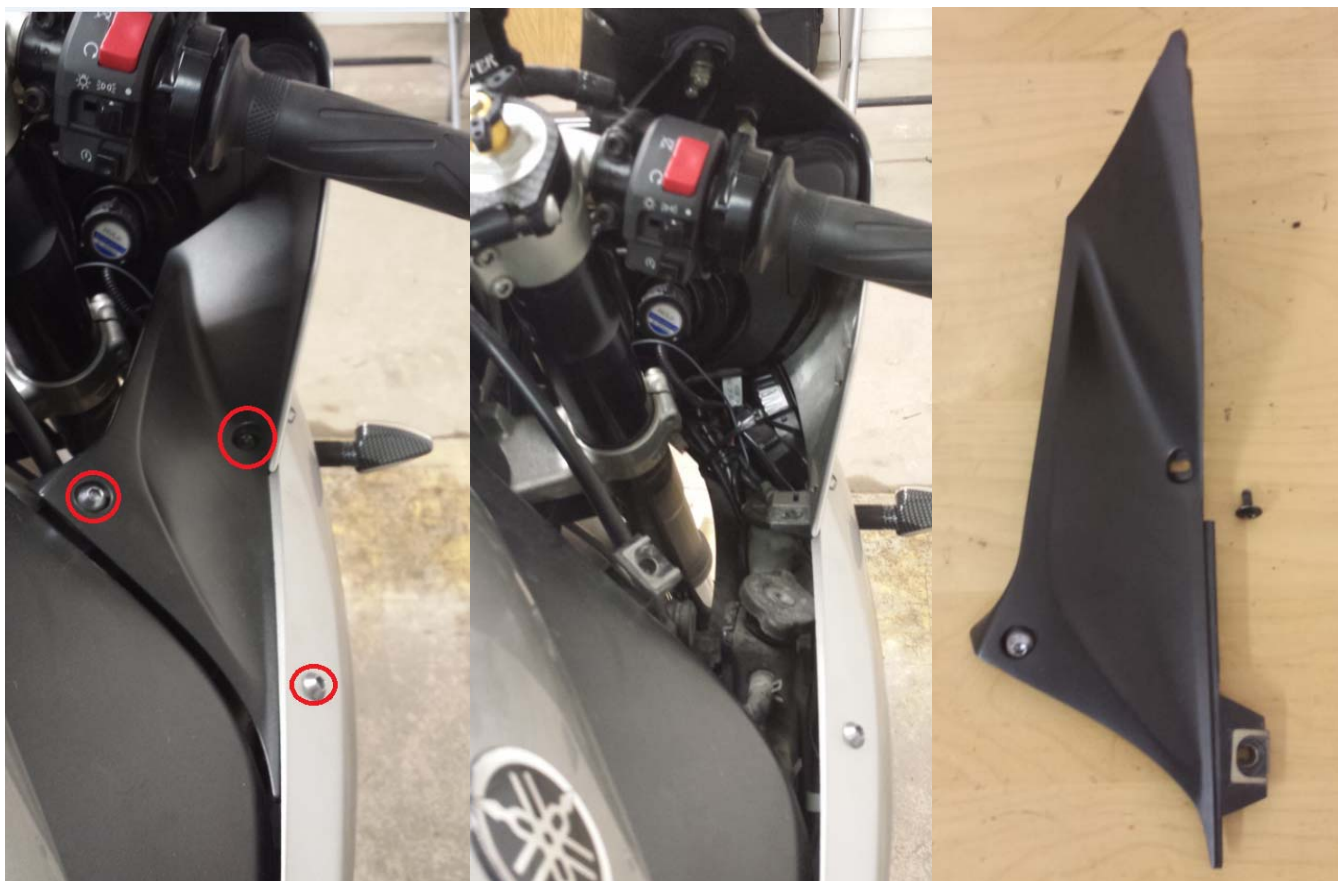

- **Remove seat**



Installing the Race Technology DASH2 PRO


GPS antenna mounting

- Race Technology advises the antenna to be mounted on the back of the bike to give the best GPS results.
- Mount the antenna with double sided tape, Velcro or glue
- Feed the GPS cable through the bike up to the DASH2 PRO using cable ties where necessary




Installing the display

- Before bolting the DASH2 PRO down:
 - Remove anti-vibration mount circled in red
 - Thread **water temperature and wheel speed sensor** cables through original dash connector hole circled in green
 - Connect GPS antenna circled in blue

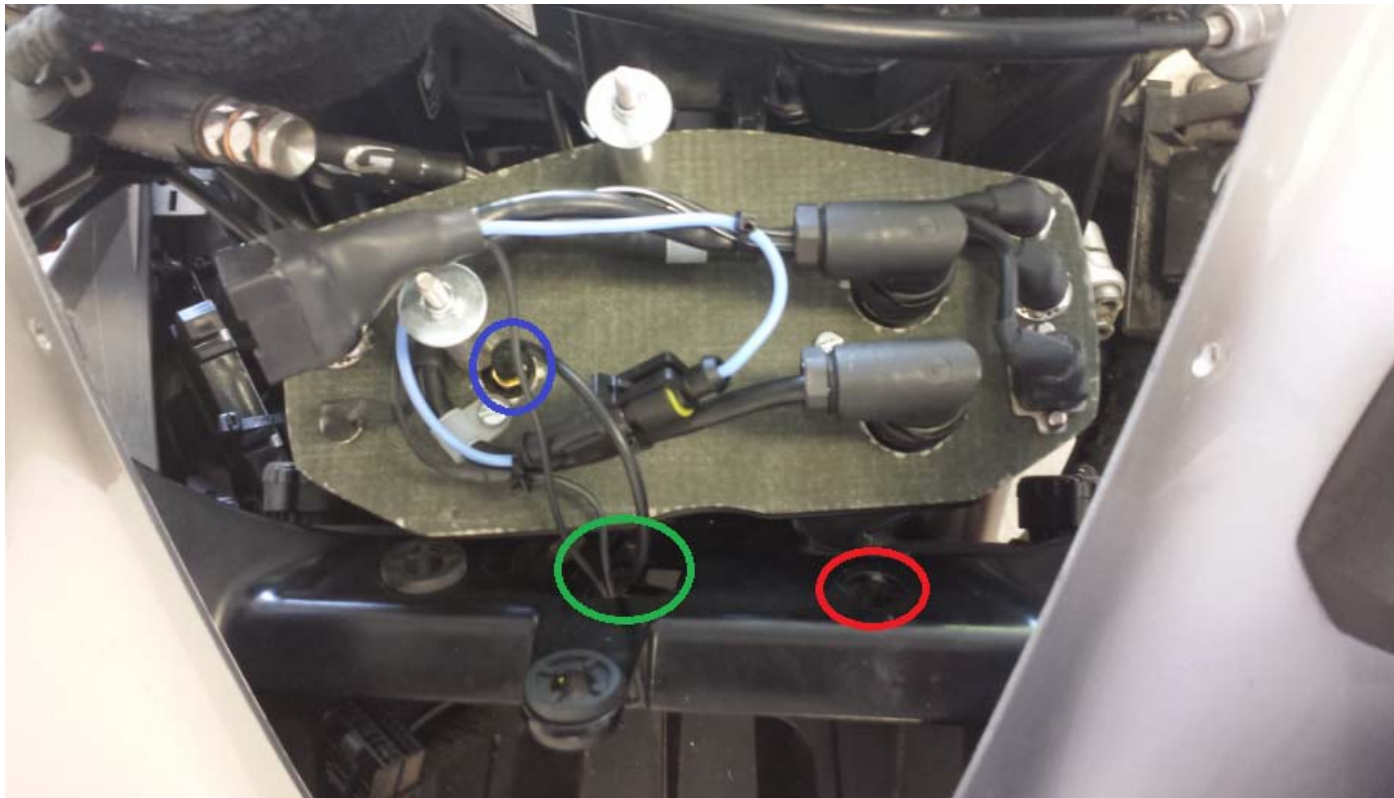

- Pass the bolts of the DASH2 PRO through the original dashboard holes and rubber mounts.
- Add the washers and nuts to the bolts and tighten - circled in green
- Add a cable tie through the hole where the anti-vibration mount was removed and around the DASH2 PRO connector circled in red
- Plug in the DASH2 PRO to the original loom circled in blue

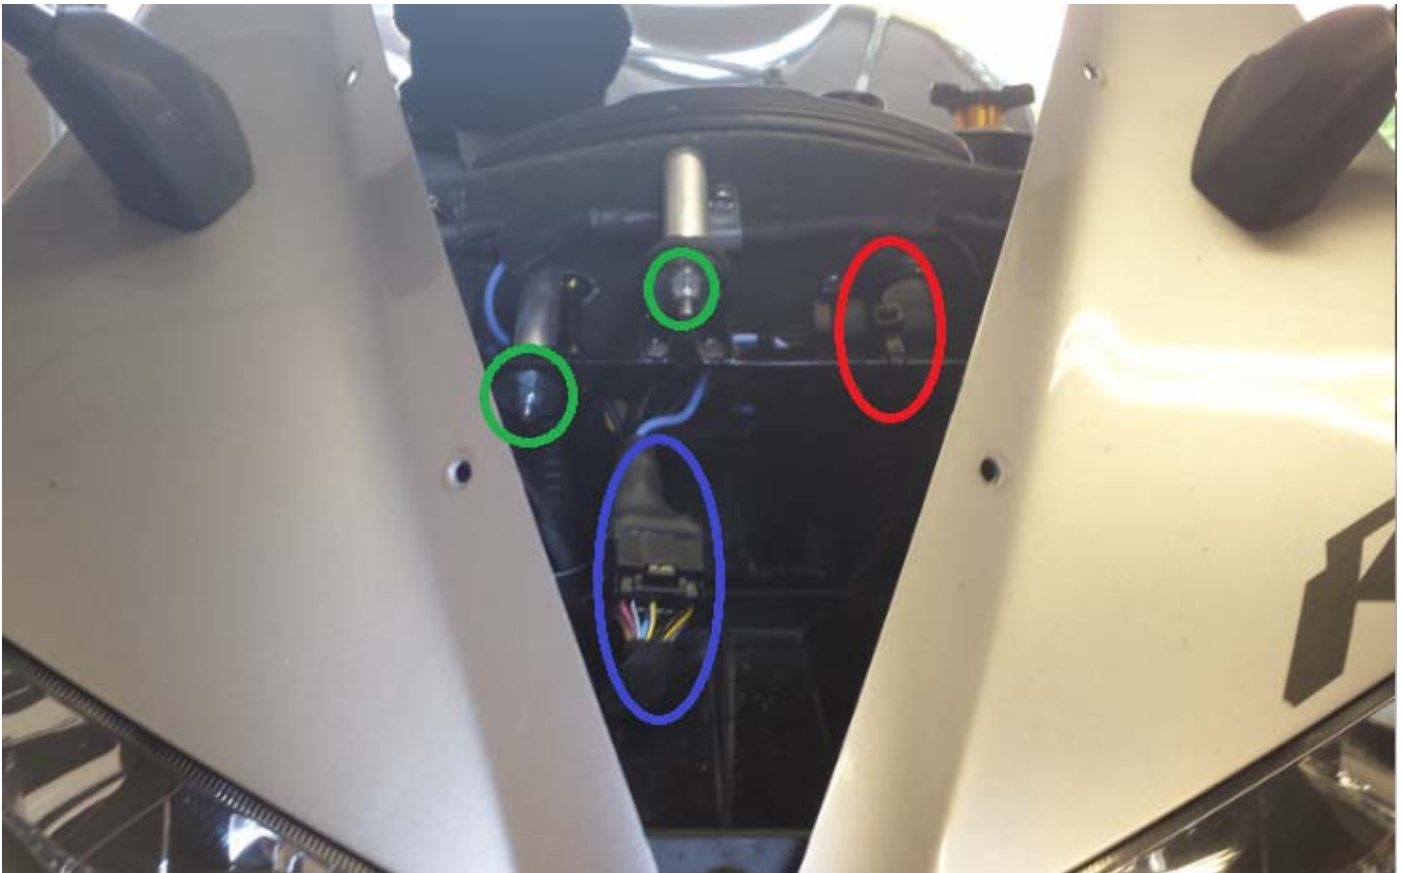

Connecting the water temperature sensor

- Unplug the water temperature sensor
 - In between the engine and radiator you will find the water temperature sensor on the side of the radiator.
 - Unplug the sensor



- Thread the inline connectors for the water temp sensor down to the water temp sensor



- Connect the inline connectors coming from the DASH2 PRO into the unplugged connector
- Connect the new connector into the water temperature sensor and cable tie where necessary.

Connect the wheel speed sensor


- Lift the tank up and hold in place




- **Locate a 3 pin in line connector for the wheel speed sensor**



- **Run the 3 pin connector coming from the DASH2 PRO to the connector on the bike and cable tie where necessary.**
- **Unplug the 3 pin connector for the wheel speed sensor and insert the inline connector coming from the DASH2 PRO and cable tie where necessary.**

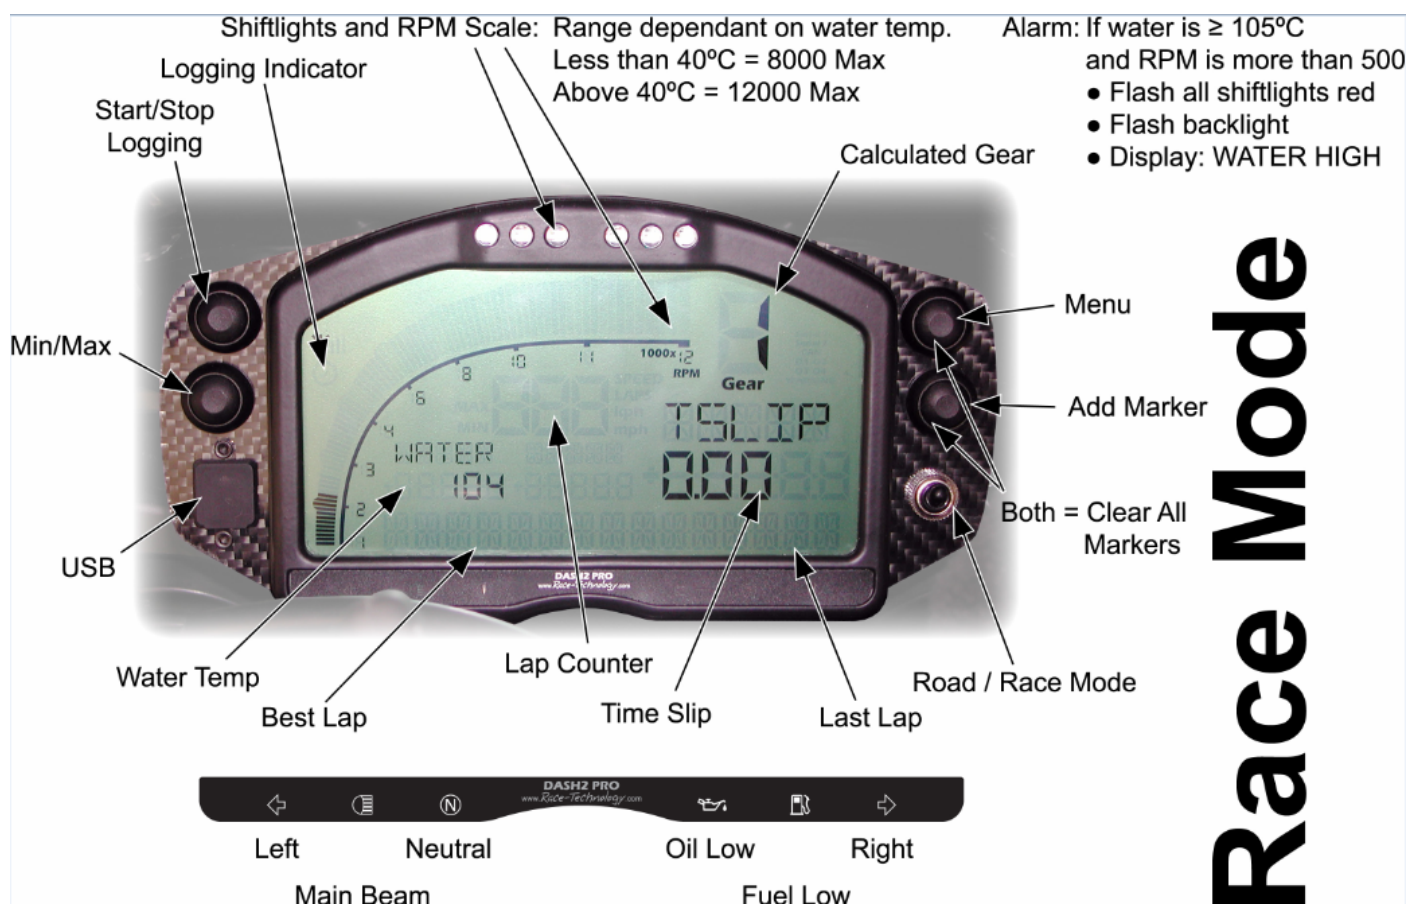

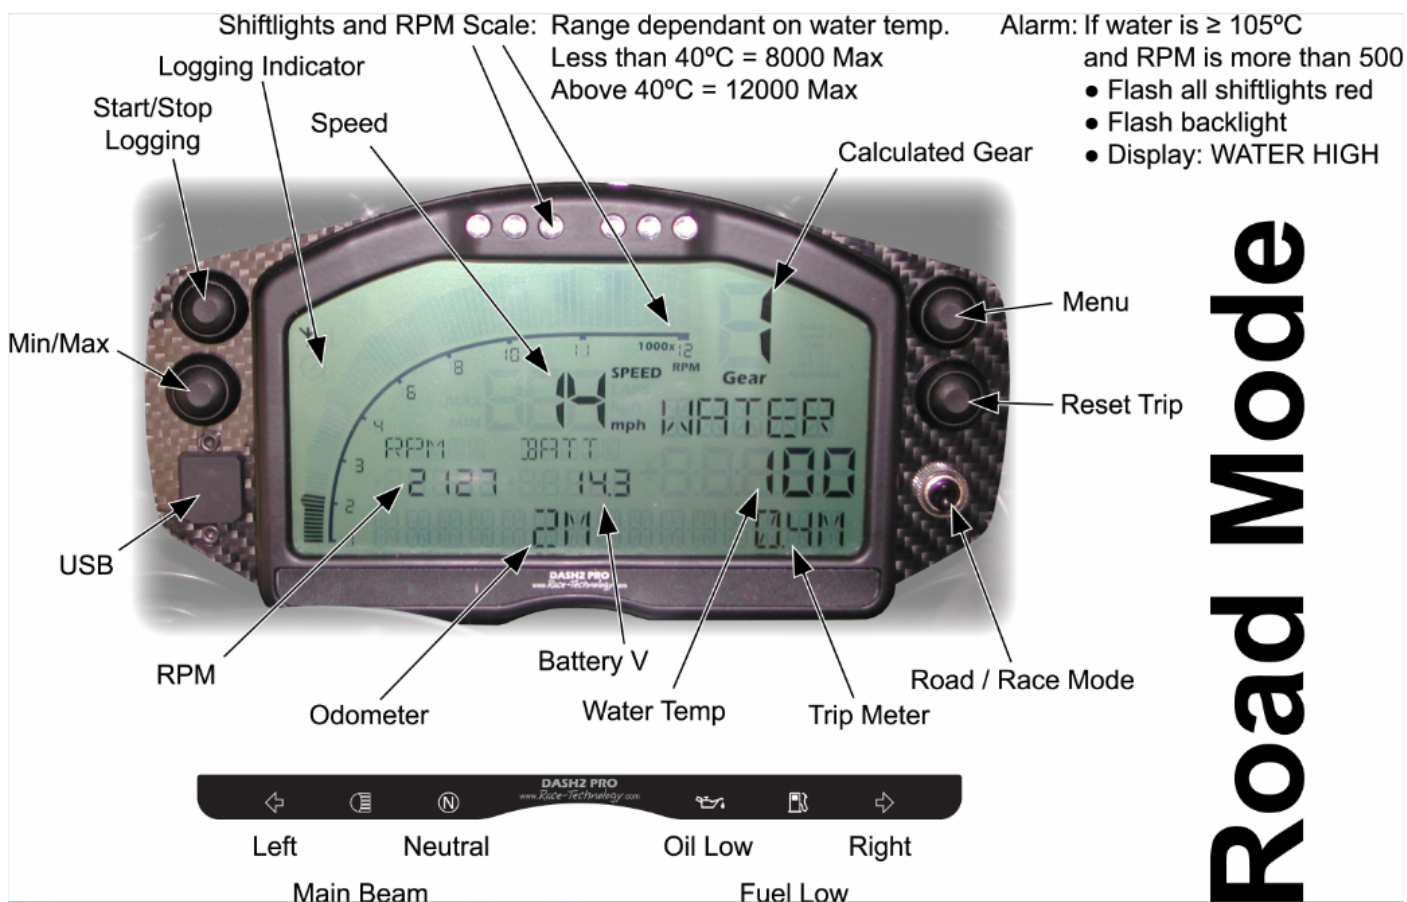

Road Mode